

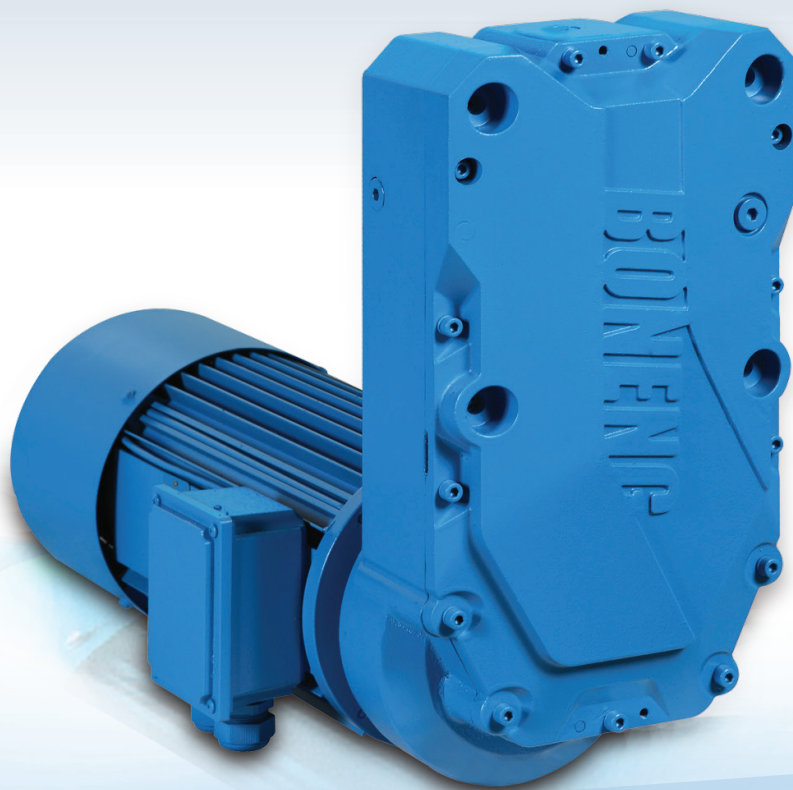


BONENG

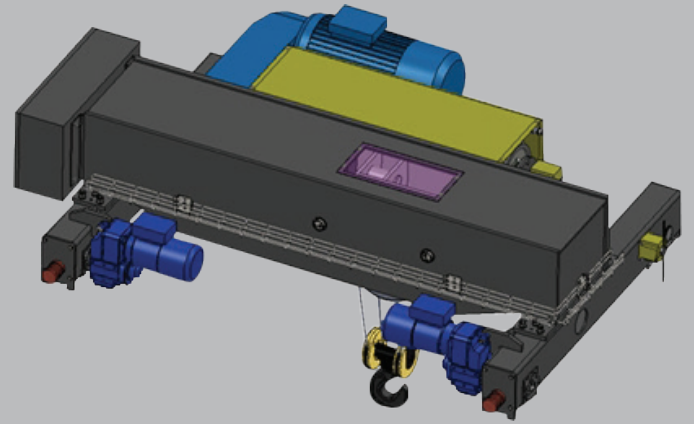

博能 FC钢绳葫芦升降齿轮马达
FC wire Rope Hoist Lifting Gearmotor

6 / 2017

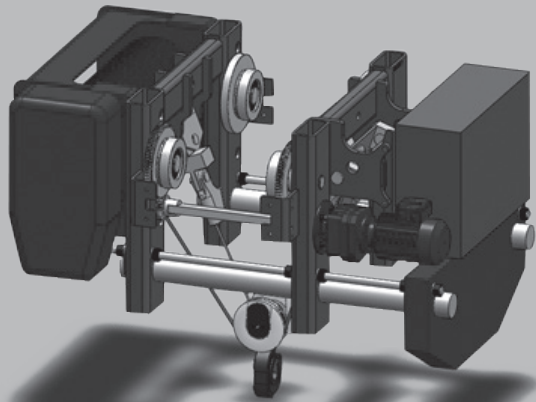

多年来，博能公司一直致力于为起重和升降领域提供卓越的驱动技术。新型FC钢绳葫芦升降齿轮马达是我公司在多年丰富经验的基础上，结合国际先进技术研发出来的革新型产品。

为获得强劲而可靠驱动系统，我们组建了专业的团队来完成设计和制造，同时团队创新改进，将使您的起重和升降设备具有更好的表现。

Boneng has been devoting to provide outstanding drive technology for hoisting and lifting field through the years. New type FC wire rope hoist lifting gearmotor is the result of our years of experience combined with international advanced technology.

For forceful and reliable drive system, we set up a dedicated team group to fulfil designing and manufacturing, meanwhile, innovative team group will get your hoisting and lifting system more favorable performance.



版权所有 ©

博能升降电机

博能升降电机有多种规格，可支持功率范围为0.37~19.2kW。具有以下突出特征：

- 强劲的马力和良好的冷却特性
- 集成式双面安全制动，响应快、低磨损、噪音低
- 电机绝缘等级H级，寿命更长久

博能升降齿轮马达

博能升降齿轮马达配有4种尺寸直接驱动钢绳缆卷筒并带制动齿轮电机。该驱动系统的设计基于FEM分析可实现4/1的滑轮倍率承载3.2到20吨，保证安全而可靠的起升操作。

显著特点有：

- 铝制电机壳体和齿轮箱，重量轻，装配简单
- 紧凑而强劲的驱动单元
- 三级平行轴式斜齿轮减速电机，结构紧凑，传动效率高，轴距加长，可安装更大直径卷筒
- 基于DIN标准设计的花键直接安装于卷筒，U型底座结构，安装简单，节省空间
- 起升速度，4/5/6.3和8m/min（1/4的滑轮倍率变频）
- 产品寿命周期内免维护

制动器

钢绳葫芦升降齿轮马达都设计配有双面安全制动器从而具有以下优势：

- 性能可靠，响应速度快
- 磨损小，寿命长
- 双面失电制动
- 安全且无振动的制动
- 非石棉的制动片



整机标配颜色 (RAL5015)

非标配颜色可按客户要求定制。

Colour of standard allocation (RAL5015) Colour of Non-standard allocation can be customized according to customer requirements

Boneng Hoisting Electric Motor

Boneng hoisting electric motor power ranges from 0.37-19.2kW

Features:

- Higher power and highly efficient motor cooling
- Intergrated double side safety brake, quick response, low wear, low noise emission
- Motor insulation grade H, long life service

Boneng Wire Rope Hoist Lifting Gearmotor

Boneng wire rope hoist lifting gearmotor is available with 4 size designs which can drive the wire rope drum directly and FEM based design realizes 4/1 pulley ratio with load capacity from 3.2 - 20T which ensures the lifting safety and reliability.

Features:


- Aluminum housing, light weight, simple to install
- Compact and strong drive unit
- 3 stage parallel shaft helical geared motor, compact construction, high efficiency, long extended center distance, allowing bigger drum mounted
- DIN standard based design, spline mounting directly to drum, U shape base, simple mounting, low space
- Lifting speed, 4/5/6.3 and 8m/min (1/4 pulley ratio, frequency)
- Free maintenance within life period

Brake

Wire rope hoist lifting gearmotor are designed with double side safety brake with follow features:

- Reliable performance, quick response
- Low wear, long life service
- Double side electric loss brake
- Safe and nonvibration brake
- Non asbestos brake pads

钢绳葫芦升降齿轮马达概览
Wire Rope Hoist Lifting Gearmotor Table

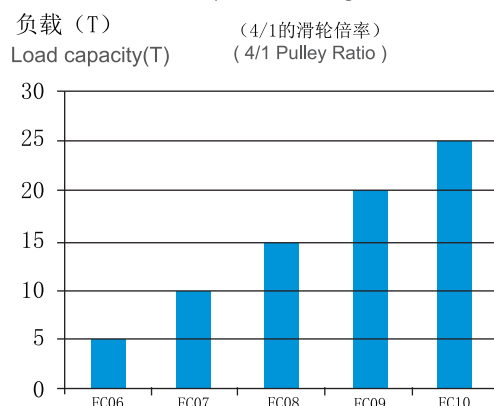


目 录

▲-----	FC06 钢绳葫芦升降齿轮马达-变频控制	05
	FC06 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled	
▲-----	FC07 钢绳葫芦升降齿轮马达-变频控制	07
	FC07 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled	
▲-----	FC08 钢绳葫芦升降齿轮马达-变频控制	09
	FC08 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled	
▲-----	FC09 钢绳葫芦升降齿轮马达-变频控制	11
	FC09 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled	
▲-----	Attachment/附件	13
▲-----	Hoisting driving system/起重机运行驱动系统	14


型号表示方法:

Type Designation:

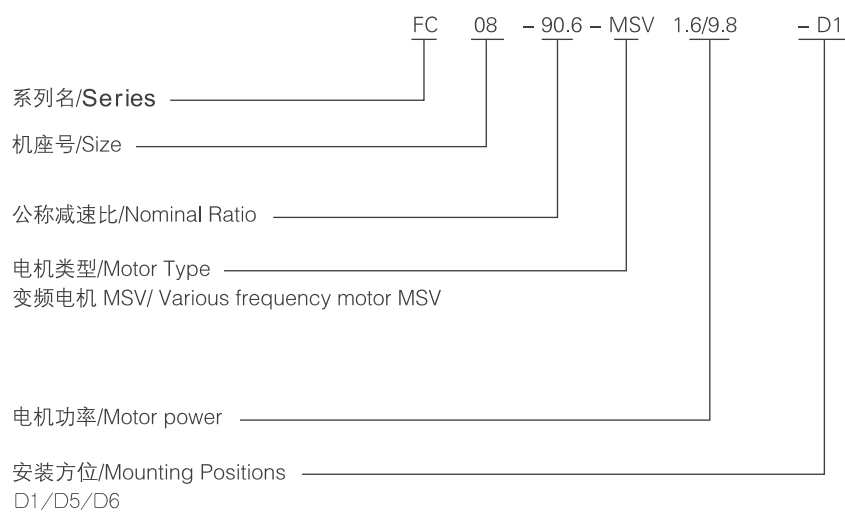

安装方位:

Mounting Positions:

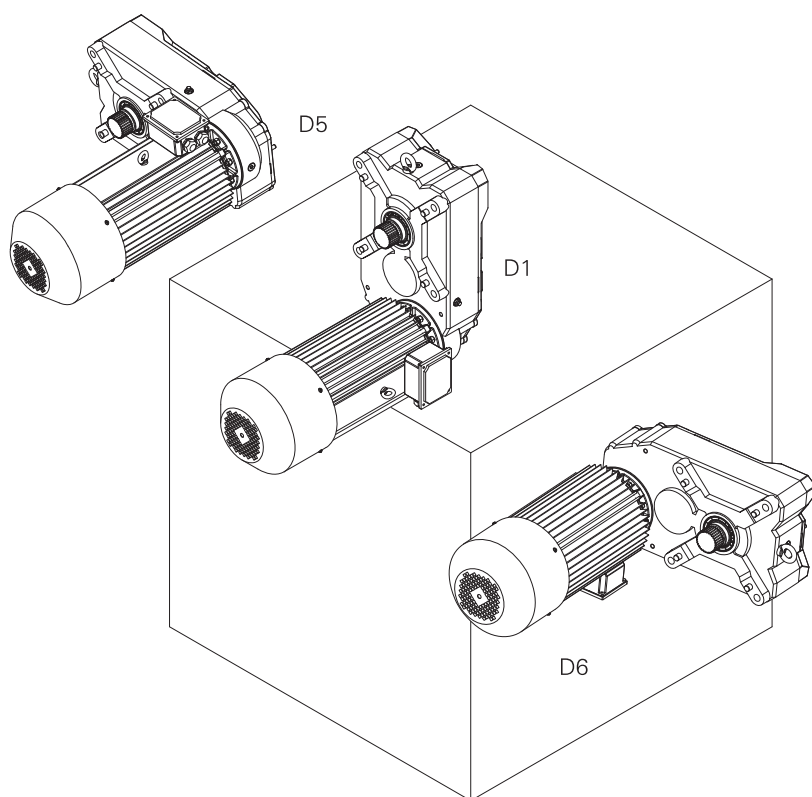



产品描述 / Description

- 参照FEM标准设计
- 铝制三级平行轴式齿轮减速电机，直接安装于卷筒
- 带双面安全制动器的大功率升降电机
- 通过标准接口装配简单
- Designed according to FEM standard
- 3 stage aluminum parallel shaft geared motor, mounted directly to rope drum
- High power hoisting electric motor with double side safety brake
- Standard connector, simple to install

技术数据 / Technical Data

技术数据 / Technical Data	
起升重量 / Lifting capacity:	达到3. 2吨 /up to 3.2T
起升速度 / Lifting speed:	4/5/6. 3/7. 5 m/min 4/1的滑轮倍率 / 4/1pulley ratio
卷筒直径 / Drum Diameter:	140mm
电机功率 / Motor power:	P=3. 2-4. 0kW (4极数@100Hz/4 poles @100Hz)
输出轴DIN 5480 / Output shaft DIN5480	W40x2x18x8f

产品优势


- 重量轻-运输成本低，装配简单
- 效率高-节能
- 设计紧凑-节省空间
- 轴距长
- 动态的加速特性-较大的启动和极限力矩
- 双面安全制动-制动平稳，安全
- 卷筒轴承支持与升降齿轮马达集成设计

Advantages

- Low weight -low shipping cost, simple to install
- Highly efficient-energy saving
- Compact design-low space
- long center distance
- Dynamic acceleration characteristics-heavier starting and limited torque
- Double side brake-stability and safety
- Integrated design is applied in drum bearing support and lifting gearmotor

FC06 钢绳葫芦升降齿轮马达-变频控制

FC06 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled

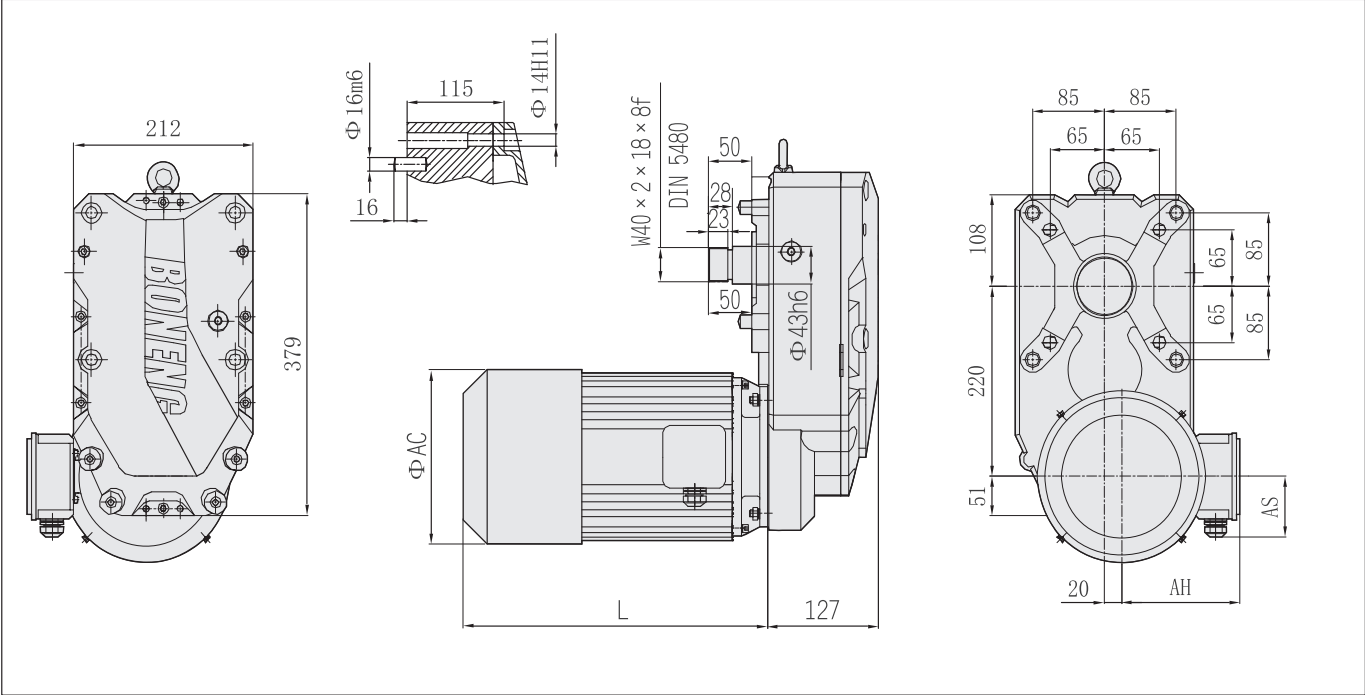

FC06 钢绳葫芦升降齿轮马达										
FC06 Wire Rope Hoist Lifting Gearmotor										
→ 卷筒直径140mm → 4/1的滑轮倍率 → Drum Diameter140mm → 4/1 pulley ratio										
Pos.	Load [t]	ISO	FEM	V [m/min]	P [kW]	f [Hz]	减速比 Ratio [i]	制动力矩 Brake Torque [N • m]	型号/Type	电机尺寸 Motor Size [mm]
1	3.2 2.5 2	M5 M6 M7	2m 3m 4m	0.66-4.0 (0.8-4.8)	3.2 (3.8)	100 (120)	76.6	60	FC06-76.6-MSV3.2	L: 448 AC: 222 AH: 177 AS: 94
2	3.2 2.5 2	M5 M6 M7	2m 3m 4m	0.8-5.0 (1.0-6.0)	3.2 (3.8)	100 (120)	63.4	60	FC06-63.4-MSV3.2	L: 448 AC: 222 AH: 177 AS: 94
3	3.2 2.5 2	M5 M6 M7	2m 3m 4m	1.0-6.3 (1.2-7.6)	4 (4.8)	100 (120)	51.1	60	FC06-51.1-MSV4	L: 448 AC: 222 AH: 177 AS: 94
4	2.5 2 1.6	M5 M6 M7	2m 3m 4m	1.3-7.5 (1.6-9.0)	4 (4.8)	100 (120)	41.7	60	FC06-41.7-MSV4	L: 448 AC: 222 AH: 177 AS: 94



产品描述 / Description

- 参照FEM标准设计
- 铝制三级平行轴式齿轮减速电机，直接安装于卷筒
- 带双面安全制动器的大功率升降电机
- 通过标准接口装配简单
- Designed according to FEM standard
- 3 stage aluminum parallel shaft geared motor, mounted directly to rope drum
- High power hoisting electric motor with double side safety brake
- Standard connector, simple to install

技术数据 / Technical Data

技术数据 / Technical Data	
起升重量 / Lifting capacity:	达到6.8吨 /up to 6.8T
起升速度 / Lifting speed:	4/5/6.3/7.5 m/min 4/1的滑轮倍率 /4/1 pulley ratio
卷筒直径 / Drum Diameter:	170mm
电机功率 / Motor power:	P=6.1~9.8kW (4极数@100Hz/4 poles @100Hz)
输出轴DIN 5480 / Output shaft DIN5480	W45x2x21x8f

产品优势


- 重量轻-运输成本低，装配简单
- 效率高-节能
- 耐腐蚀-无需另外上漆
- 设计紧凑-节省空间
- 轴距长
- 动态的加速特性-较大的启动和极限力矩
- 双面安全制动-制动平稳，安全
- 卷筒轴承支持与升降齿轮马达集成设计

Advantages

- Low weight -low shipping cost, simple to install
- Highly efficient-energy saving
- Corrosion-resistant-no need painting
- Compact design-low space
- long center distance
- Dynamic acceleration characteristics-heavier starting and limited torque
- Double side brake-stability and safety
- Integrated design is applied in drum bearing support and lifting gearmotor

FC07 钢绳葫芦升降齿轮马达-变频控制

FC07 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled

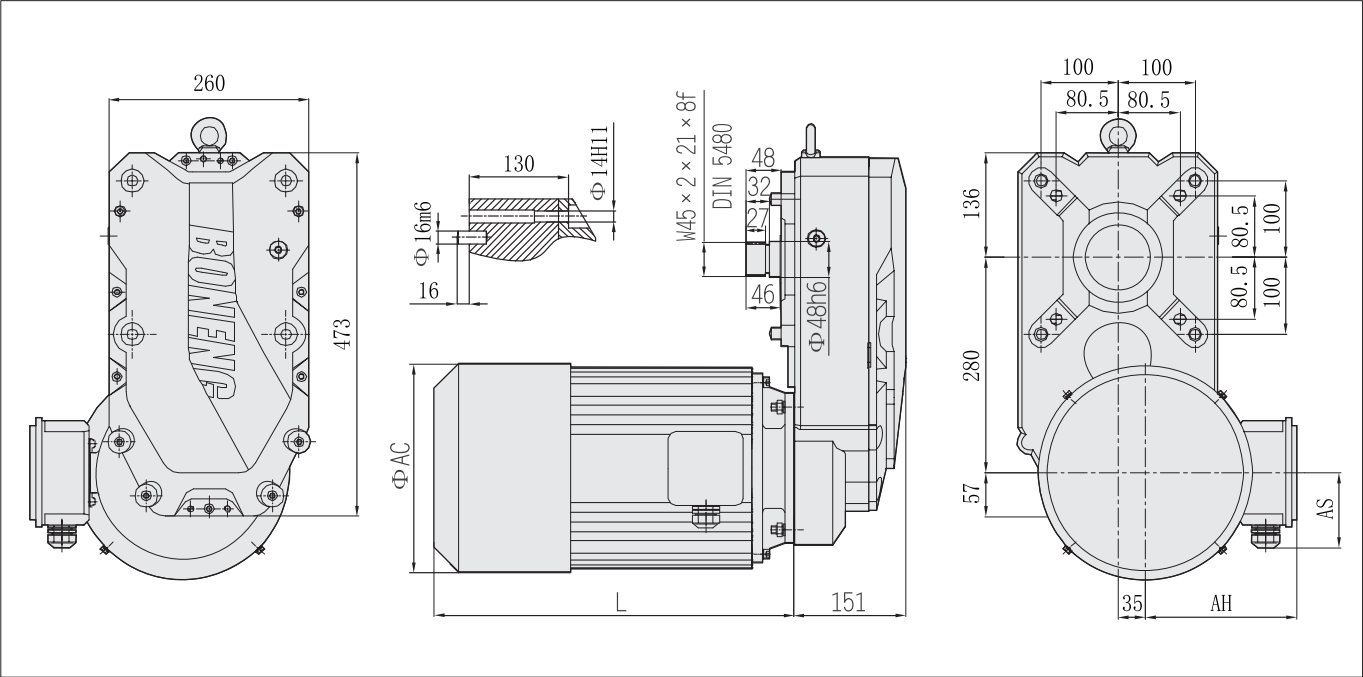

FC07 钢绳葫芦升降齿轮马达					FC07 Wire Rope Hoist Lifting Gearmotor					
→卷筒直径170mm					→Drum Diameter170mm					
→4/1的滑轮倍率					→4/1 pulley ratio					
Pos.	Load [t]	ISO	FEM	V [m/min]	P [kW]	f [Hz]	减速比 Ratio [i]	制动力矩 Brake Torque [N·m]	型号/Type	电机尺寸 Motor Size [mm]
1	6.8	M5	2m	0.66-4.0 (0.8-4.8)	6.1 (7.3)	100 (120)	85.8	60	FC07-85.8-MSV6.1	L: 448 AC: 222 AH: 177 AS: 94
2	6.8	M5	2m	0.8-5.0 (1.0-6.0)	6.1 (7.3)	100 (120)	78.3	60	FC07-78.3-MSV6.1	L: 448 AC: 222 AH: 177 AS: 94
3	6.8	M4	1Am	1.0-6.3 (1.2-7.6)	9.8 (11.8)	100 (120)	64.1	100	FC07-64.1-MSV9.8	L: 485 AC: 272 AH: 203 AS: 94
4	6.8	M4	1Am	1.3-7.5 (1.6-9.0)	9.8 (11.8)	100 (120)	52.5	100	FC07-52.5-MSV9.8	L: 485 AC: 272 AH: 203 AS: 94



产品描述 / Description

- 参照FEM标准设计
- 铝制三级平行轴式齿轮减速电机，直接安装于卷筒
- 带双面安全制动器的大功率升降电机
- 通过标准接口装配简单
- Designed according to FEM standard
- 3 stage aluminum parallel shaft geared motor, mounted directly to rope drum
- High power hoisting electric motor with double side safety brake
- Standard connector, simple to install

技术数据 / Technical Data

技术数据 /Technical Data	
起升重量 / Lifting capacity:	达到12. 5吨 /up to 12.5T
起升速度 / Lifting speed:	4/5/6. 3/8 m/min 4/1的滑轮倍率 /4/1pulley ratio
卷筒直径 / Drum Diameter:	266mm
电机功率	P=9. 8~12. 5kW (4极数@100Hz/4 poles @100Hz)
输出轴DIN 5480 / Output shaft DIN5480	W65x2x31x8f

产品优势


- 重量轻-运输成本低，装配简单
- 效率高-节能
- 耐腐蚀-无需另外上漆
- 设计紧凑-节省空间
- 轴距长
- 动态的加速特性-较大的启动和极限力矩
- 双面安全制动-制动平稳，安全
- 卷筒轴承支持与升降齿轮马达集成设计

Advantages

- Low weight -low shipping cost, simple to install
- Highly efficient-energy saving
- Corrosion-resistant-no need painting
- Compact design-low space
- long center distance
- Dynamic acceleration characteristics-heavier starting and limited torque
- Double side brake-stability and safety
- Integrated design is applied in drum bearing support and lifting gearmotor

FC08 钢绳葫芦升降齿轮马达-变频控制

FC08 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled

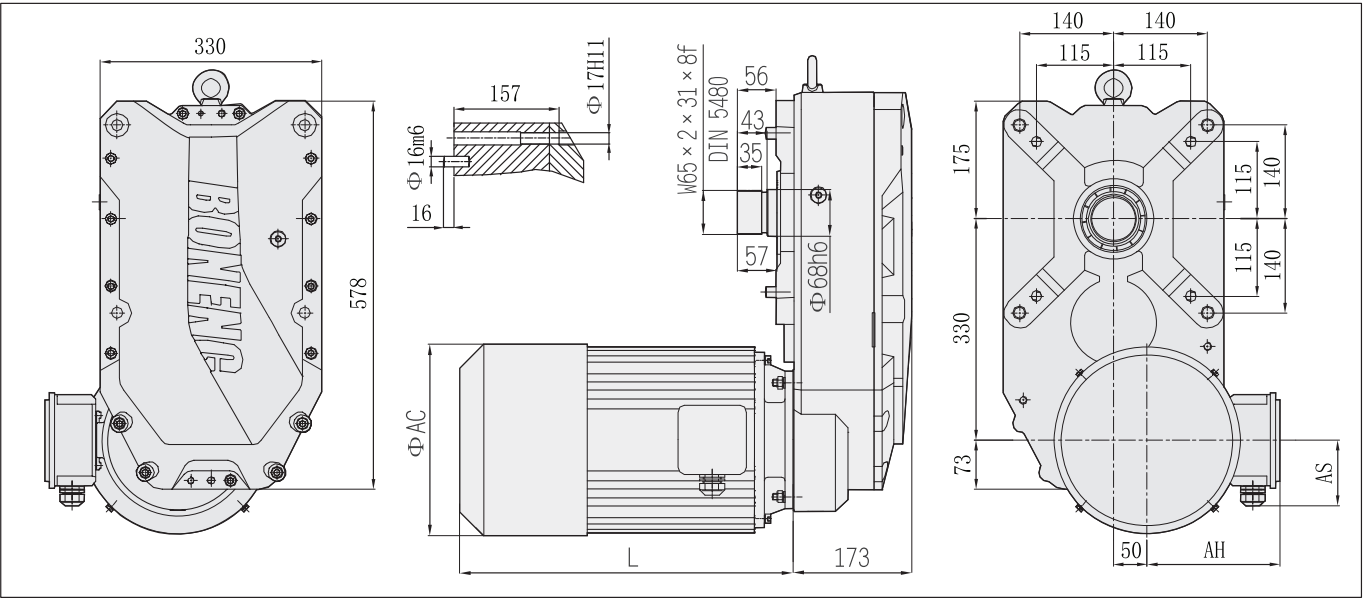

FC08 钢绳葫芦升降齿轮马达							FC08 Wire Rope Hoist Lifting Gearmotor			
→卷筒直径266mm							→Drum Diameter266mm			
→4/1的滑轮倍率							→4/1 pulley ratio			
Pos.	Load [t]	ISO	FEM	V [m/min]	P [kW]	f [Hz]	减速比 Ratio [i]	制动力矩 Brake Torque [N·m]	型号/Type	电机尺寸 Motor Size [mm]
1	10	M5	2m	0.66-4.0 (0.8-4.8)	9.8 (11.8)	100 (120)	152.1	100	FC08-152.1-MSV9.8	L: 485
	8	M6	3m							AC: 272
	6.3	M7	4m							AH: 203
	5	M7	4m							AS: 94
2	10	M5	2m	0.8-5.0 (1.0-6.0)	9.8 (11.8)	100 (120)	126.5	100	FC08-126.5-MSV9.8	L: 485
	8	M6	3m							AC: 272
	6.3	M7	4m							AH: 203
	5	M7	4m							AS: 94
3	8	M5	2m	1.0-6.3 (1.2-7.6)	9.8 (11.8)	100 (120)	90.6	100	FC08-90.6-MSV9.8	L: 485
	6.3	M6	3m							AC: 272
	5	M7	4m							AH: 203
	4	M7	4m							AS: 94
4	6.3	M5	2m	1.3-8.0 (1.6-9.6)	9.8 (11.8)	100 (120)	72.5	100	FC08-72.5-MSV9.8	L: 485
	5	M6	3m							AC: 272
	4	M7	4m							AH: 203
	3.2	M7	4m							AS: 94
5	12.5	M5	2m	0.66-4.0 (0.8-4.8)	9.8 (11.8)	100 (120)	152.1	100	FC08-152.1-MSV9.8	L: 485
	10	M6	3m							AC: 272
	8	M7	4m							AH: 203
	6.3	M7	4m							AS: 94
6	12.5	M4	1Am	0.8-5.0 (1.0-6.0)	12.5 (15.0)	100 (120)	126.5	150	FC08-126.5-MSV12.5	L: 535
	10	M5	2m							AC: 272
	8	M6	3m							AH: 203
	6.3	M7	4m							AS: 94
7	10	M4	1Am	1.0-6.3 (1.2-7.6)	12.5 (15.0)	100 (120)	90.6	150	FC08-90.6-MSV12.5	L: 535
	8	M5	2m							AC: 272
	6.3	M6	3m							AH: 203
	5	M7	4m							AS: 94
8	8	M4	1Am	1.3-8.0 (1.6-9.6)	12.5 (15.0)	100 (120)	72.5	150	FC08-72.5-MSV12.5	L: 535
	6.3	M5	2m							AC: 272
	5	M6	3m							AH: 203
	4	M7	4m							AS: 94



产品描述 / Description

- 参照FEM标准设计
 - 铝制三级平行轴式齿轮减速电机，直接安装于卷筒
 - 带双面安全制动器的大功率升降电机
 - 通过标准接口装配简单
- Designed according to FEM standard
 - 3 stage aluminum parallel shaft geared motor, mounted directly to rope drum
 - High power hoisting electric motor with double side safety brake
 - Standard connector, simple to install

技术数据 / Technical Data

技术数据 / Technical Data	
起升重量 / Lifting capacity:	达到20吨 /up to 20T
起升速度 / Lifting speed:	4/5/6.3/8 m/min 4/1的滑轮倍率/4/1pulley ratio
卷筒直径 / Drum Diameter:	295mm
电机功率 / Motor power:	P=12.5~16kW (4极数@100Hz/4 poles @100Hz)
输出轴DIN 5480 / Output shaft DIN5480	W75x2x36x8f

产品优势


- 重量轻-运输成本低，装配简单
- 效率高-节能
- 耐腐蚀-无需另外上漆
- 设计紧凑-节省空间
- 轴距长
- 动态的加速特性-较大的启动和极限力矩
- 双面安全制动-制动平稳，安全
- 卷筒轴承支持与升降齿轮马达集成设计

Advantages

- Low weight -low shipping cost, simple to install
- Highly efficient-energy saving
- Corrosion-resistant-no need painting
- Compact design-low space
- long center distance
- Dynamic acceleration characteristics-heavier starting and limited torque
- Double side brake-stability and safety
- Integrated design is applied in drum bearing support and lifting gearmotor

FC09 钢绳葫芦升降齿轮马达-变频控制

FC09 Wire Rope Hoist Lifting Gearmotor-Frequency Controlled

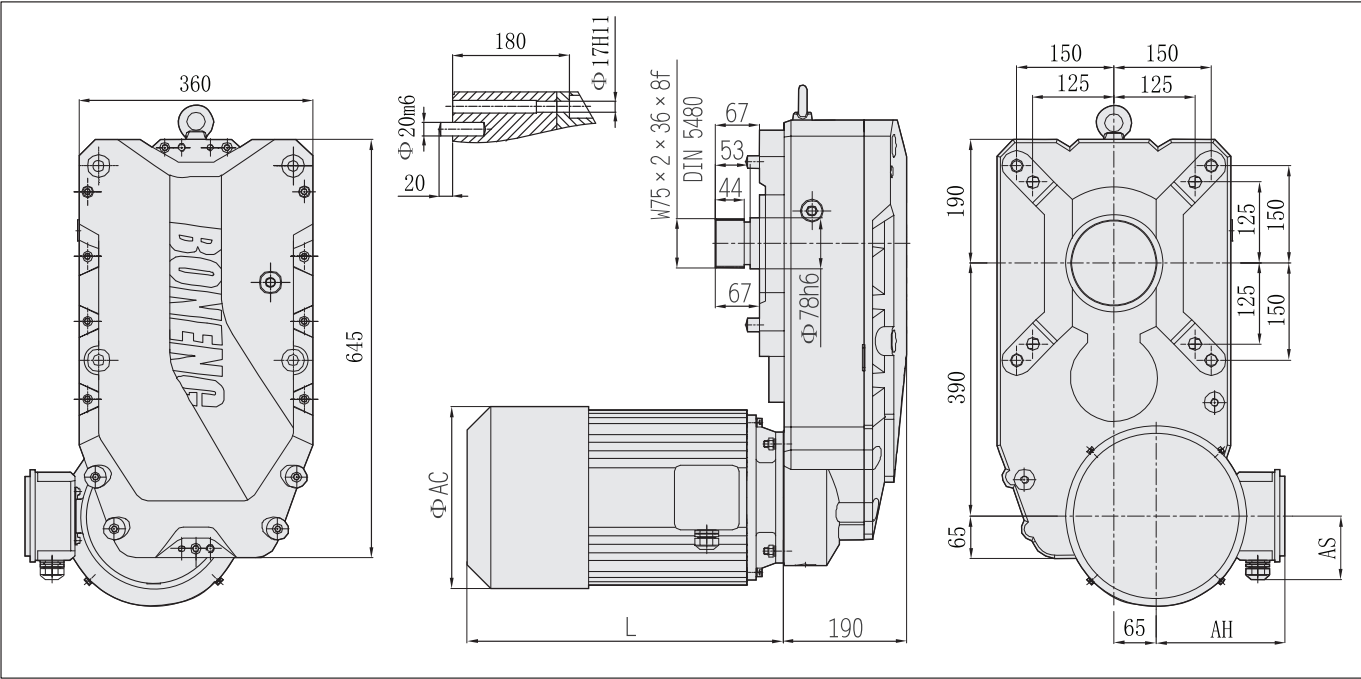

FC09 钢绳葫芦升降齿轮马达					FC09 Wire Rope Hoist Lifting Gearmotor					
→ 卷筒直径295mm →4/1的滑轮倍率					→Drum Diameter295mm →4/1 pulley ratio					
Pos.	Load [t]	ISO	FEM	V [m/min]	P [kW]	f [Hz]	减速比 Ratio [i]	制动力矩 Brake Torque [N·m]	型号/Type	电机尺寸 Motor Size [mm]
1	16	M5	2m	0.66-4.0 (0.8-4.8)	12.5 (15.0)	100 (120)	170.2	150	FC09170.2-MSV12.5	L: 535
	12.5	M6	3m							AC: 272
	10	M7	4m							AH: 203
	8	M7	4m							AS: 94
2	20	M4	1Am	0.66-4.0 (0.8-4.8)	16.0 (19.2)	100 (120)	170.2	150	FC09170.2-MSV16.0	L: 535
	16	M5	2m							AC: 272
	12.5	M6	3m							AH: 203
	10	M7	4m							AS: 94
3	16	M4	1Am	0.8-5.0 (1.0-6.0)	16.0 (19.2)	100 (120)	137.1	150	FC09137.1-MSV16.0	L: 535
	12.5	M5	2m							AC: 272
	10	M6	3m							AH: 203
	8	M7	4m							AS: 94
4	12.5	M4	1Am	1.0-6.3 (1.2-7.6)	16.0 (19.2)	100 (120)	107.1	150	FC09107.1-MSV16.0	L: 535
	10	M5	2m							AC: 272
	8	M6	3m							AH: 203
	6.3	M7	4m							AS: 94
5	10	M4	1Am	1.3-8.0 (1.6-9.6)	16.0 (19.2)	100 (120)	82.9	150	FC0982.9-MSV16.0	L: 535
	8	M5	2m							AC: 272
	6.3	M6	3m							AH: 203
	5	M7	4m							AS: 94

附件

1.0 润滑油

Attachment

1.0 Lubrication oil

规格 /Size	FC06	FC07	FC08	FC09
注油量/Oil mass (L)	2.5	5.5	9	12

注：


- 1、产品使用环境温度-20℃～+40℃
- 2、产品出厂已加润滑油，粘度牌号为VG680（ISO粘度等级）；
- 3、当环境温度低于-10℃必须使用合成油；
- 4、为保证产品寿命，实际使用中建议使用合成油；
- 5、若环境温度超出上述范围，敬请垂询。

Note:

- 1 Products using the environment temperature of -20℃ ~ +40℃
- 2 Lubrication oil has been added before delivery,viscosity code:VG680(ISO Viscosity grade);
- 3 when the temperature is lower than -10 DEG C will To use synthetic oil;
- 4 In order to ensure the service life of the product, in actual use, recommend the use of synthetic oil;
- 5 If the ambient temperature is beyond the scope of the above, please contact.

BONENG 起重机运行驱动系统

Hoisting driving system

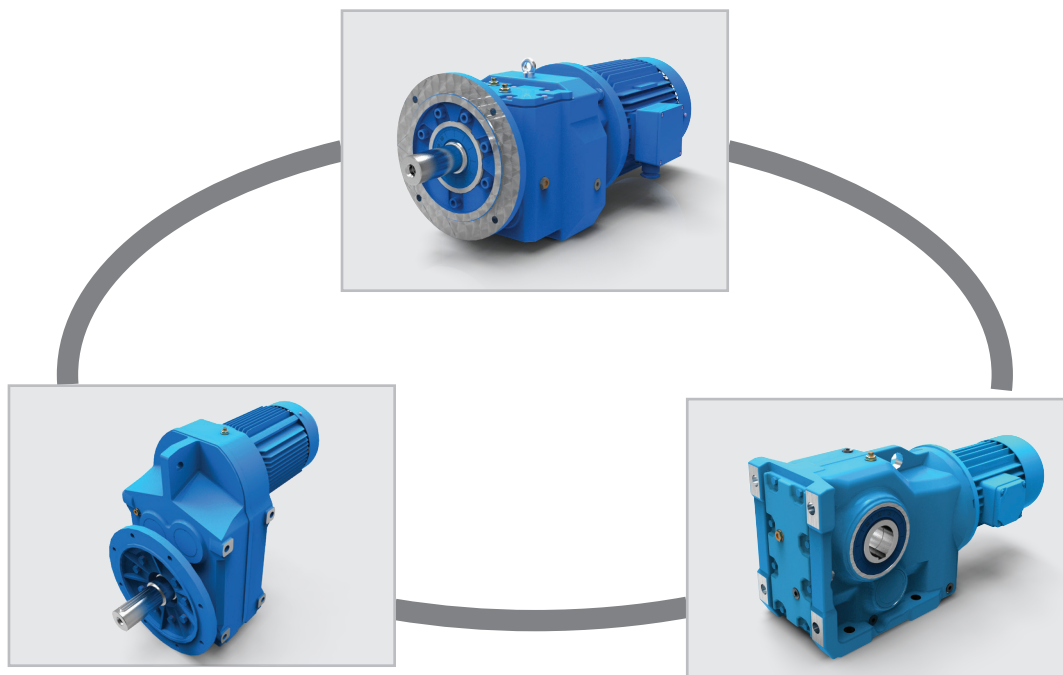

BONENG为起重机运行驱动系统根据应用不同提供多种系列产品，并具有不同的产品特性和用途：

CR斜齿轮减速机

F平行轴斜齿轮减速机

K斜齿-螺旋锥齿轮减速机

.....

所有的减速电机结构紧凑包含了电机、减速机、制动器。同时，为我们的用户提供以下优势：

- 独创模块化设计，零部件通用化最大化，便于 国际化生产，库存少，供货周期短
- 拥有底座式、法兰式、轴装式等多种安装方式，能满足客户不同安装方式要求
- 拟生态外观设计，赋予产品运动和力量的天性
- 精确的定位
- 整机自重轻

.....

(如有需要，可向我公司销售人员索取该系列样本)

Boneng provide various kinds product for hoisting driving system of different application and with different features and application.

CR helical gear units

F parallel shaft helical gear units

K helical-spiral bevel gear units

.....

Compact design, equipped with motor, housing, brake. Advantages are as below:

- Unique modular design, universal maximization, international production friendly, low stock, short supplying circle
- Available with foot, flange, shaft mounted will meet different requirement on mounting
- Ecological design is endowed with a meaning of motion and strength
- Precise position
- Low weight

.....

(Any request, please talk to our sales for brochure)

东北区 North-east District		
沈 阳 SHENGYANG	110013	
沈河区友好街19号奉天银座B2208号 TEL:024-31281850 FAX:31281851		
大 连 DALIAN	116021	
甘井子区中华西路18号中南大厦A座1309室 TEL:0411-39728495 FAX:39728496		
长 春 CHANGCHUN	130041	
长春市贵阳街建设大厦22楼2206室 TEL:0431-86702576 FAX:86702577		
哈 尔 滨 HAERBIN	150001	
南岗区长江路209号浦发大厦A栋1208室 TEL:0451-53635817 FAX:53635815		

华北区 North china District		
北 京 BEIJING	100176	
经济技术开发区荣华中路8号力宝广场10号楼1007 TEL:010-82844108 FAX:82844109		
天 津 TIANJIN	300021	
北辰区双海道6号 TEL:022-27252801 FAX:27252802		
唐 山 TANGSHAN	063000	
高新技术开发区卫国路1698号唐山科技中心12层 TEL:0315-3476336 FAX:3476337		
石 家 庄 SHIJIAZHUANG	050011	
桥西区槐安西路88号卓达中苑商务大厦B座418室 TEL:0311-68120930 FAX:68120931		
太 原 TAIYUAN	030006	
迎泽区迎泽大街7号万邦国际2310 TEL:0351-7425539 FAX:7425529		
包 头 BAOTOU	014010	
青山区金荣建材城B座1713室 TEL:0472-5908677 FAX:5908678		

保 定 BAODING	071000	
南市区裕华西路557号华创国际广场写字楼1405室 TEL:0312-6770052 FAX:6770053		

华南区 South china District		
长 沙 CHANGSHA	410205	
望城经济开发区普瑞大道1288号 TEL:0731-88382129 FAX:88383129		
广 州 GUANGZHOU	510630	
海珠区新港东路琶洲新村11栋1511 TEL:020-38372340 FAX:37592742		
柳 州 LIUZHOU	545000	
城中区龙城路21号瑞泰大厦14-2 TEL:0772-5393606 FAX:2808624		
深 圳 SHENZHEN	518101	
宝安区新安街道前进一路269号诺铂广场1129室 TEL:0755-82305500 FAX:25490492		
衡 阳 HENGYANG	430407	
石鼓区解放路66号中建国际大厦19-19009 TEL:0734-8161885 FAX:8161880		


贵 阳 GUIYANG	550002	
南明区花果园C区10栋（国际中心2号）3118 TEL:0851-85951120 FAX:85951120		
昆 明 KUNMING	650021	
白塔路298号七彩之门二单元2607室 TEL:0871-63627910 FAX:63627909		
泉 州 QUANZHOU	362000	
丰泽区万达广场SOHO B座1913室 TEL:0595-22518045 FAX:22518046		
南 昌 NANCHANG	330003	
嘉定区红谷中大道1619号国际金融大厦A-1319 TEL:0791-86662106 FAX:86661651		

华东区 East china District		
苏 州 SUZHOU	215131	
江苏省苏州市相城区如元路100号 TEL:0512-66189688 FAX:66189656		
上 海 SHANGHAI	200060	
嘉定区曹安公路2038号华拓大厦609室 TEL:021-62463133 FAX:62463384		
南 京 NANJING	210009	
南京市玄武区珠江路88号A座4329室 TEL:025-83476585 FAX:83476586		
无 锡 WUXI	214007	
长江北路282号新区哥伦布广场2321室 TEL:0510-82764282 FAX:82765791		
张 家 港 ZHANGJIAGANG	215600	
城北路178号华芳国际大厦B1121室 TEL:0512-58157114 FAX:58157040		
徐 州 XUZHOU	221000	
泉山区建国西路75号财富广场B座710室 TEL:0516-83739651 FAX:83739650		
常 州 CHANGZHOU	213002	
武进区延政中路5号常发大厦808室 TEL:0519-88168691 FAX:88168637		
泰 州 TAIZHOU	225300	
海陵区鼓楼南路99号华润国际10号楼1311室 TEL:0523-86839991 FAX:86839992		
济 南 JINAN	250031	
顺河街东侧66号银座晶都国际2号楼2505室 TEL:0531-85899337 FAX:85899606		
宜 兴 YIXING	214200	
宜兴市环科园新城路东来国际商务港602室 TEL:0512-87074998 FAX:97064828		
芜 湖 WUHU	241000	
芜湖市镜湖区万达广场二期3号楼402室 TEL:0553-5715686 FAX:5715689		
漂 阳 LIYANG	213300	
江苏省溧阳市燕山路福田中心1608室 TEL:0519-80891338 FAX:80892338		

青 岛 QINGDAO	266012	
胶南市铁山路1号石桥大厦1918室 TEL:0532-83839073 FAX:83839244		
潍 坊 WEIFANG	261000	
东风东街360号世纪泰华F座1911室 TEL:0536-8235189 FAX:8235037		
济 宁 JINING	272000	
高新区杨桥三角绿地万丽富德广场1210 TEL:0537-7972321 FAX:7972456		
合 肥 HEFEI	230011	
胜利路蓝鲸国际大厦1811号 TEL:0551-64240459 FAX:64240460		
杭 州 HANGZHOU	310003	
滨江区凯瑞金座2012室 TEL:0571-87296236 FAX:87296527		
宁 波 NINGBO	315000	
宁波市鄞州区首南街道鄞州商会南楼2019室 TEL:0574-87165507 FAX:87165557		
温 州 WENZHOU	325102	
永嘉县瓯北镇博能路69号 TEL:0577-67368888 FAX:67368899		

中西区 Central and western District		
郑 州 ZHENGZHOU	450000	
中原区中原中路171号11号楼综合楼2单元2504号 TEL:0371-66291501 FAX:66291502/79		
重 庆 CHONGQING	400039	
高新区陈家坪帝豪名都5A-15 TEL:023-68856736 FAX:68856756		
武 汉 WUHAN	430077	
武汉市武昌区和平大道积玉桥万达广场13-2304号 TEL:027-87253387 FAX:87253019		
成 都 CHENGDOU	610031	
金府区金府路666号1栋31层3105室 TEL:028-87741100 FAX:87740066		
西 安 XIAN	710075	
高新区唐延南路11号逸翠园都会1-1-10714 TEL:029-87816677 FAX:87814656		
洛 阳 LUOYANG	471003	
涧西区西区南昌路创展国际1-2308 TEL:0379-64386861 FAX:64386862		
兰 州 LANZHOU	471003	
七里河区硷沟沿270号西夏城市广场C塔915室 TEL:0931-4608517 FAX:4608518		
乌 鲁 木 齐 URUMCHI	830000	
天山区新华北路汇丰大厦写字楼15楼J室 TEL:0991-4550100 FAX:4558510		
银 川 YINCHUAN	750000	
美德亨大厦19楼1902号 TEL:0951-5137873 FAX:5137872		
长 垣 CHANGYUAN	453400	
起重机械工业园纽科伦公司物资采购中心301室 TEL:0373-5998568 FAX:8622029		



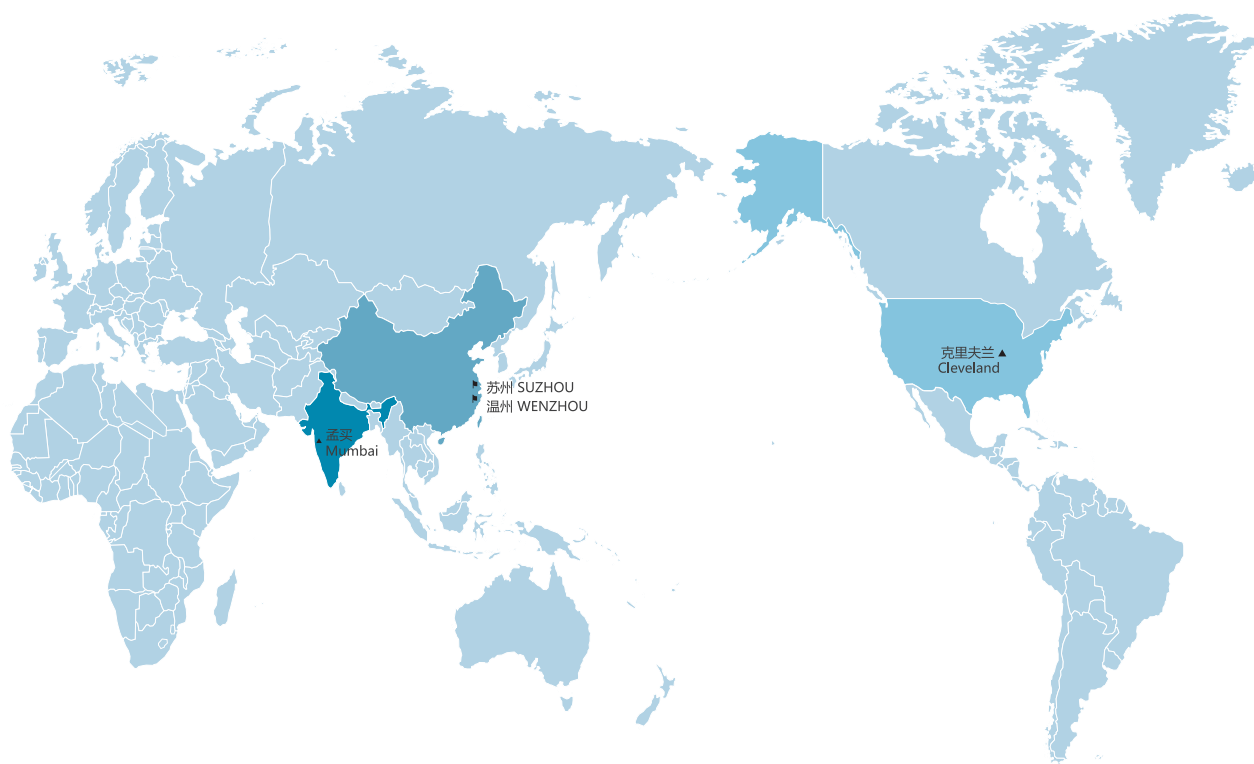

■ 生产基地
▲ 分公司

Production base
Branches

博能传动国际部

International Department
TEL: + 86 - 512 - 66189922
FAX: + 86 - 512 - 66189627
E-mail: info@boneng.com

博能传动（印度）有限公司

BonengTransmission(India)Pvt.Ltd
No.603,Bhumiraj Costa Rica Commercial
Building,Plot1&2,Palm Beach Road,Sector
18,Sanpada,Navi Mumbai400705 India
E-mail:india@boneng.com
TEL:+91 22 2781 3385
FAX:+91 22 2781 3386

博能传动（美国）有限公司

BonengTransmission(USA)LLC.
1670 ENTERPRISE PARKWAY,
TWINSBURG,OH 44087
E-mail: america@boneng.com
TEL:1-330-425-1516
FAX:1-330-425-1519

有关公司产品目录的内容，随着技术进步等，将会有变更，望谅解！
Along with the technology advanced et.,the product of the manual of
Boneng will be changed,please forgive.

博能传动(苏州)有限公司/BONENG TRANSMISSION (SUZHOU) CO.,LTD

苏州市相城区如元路100号/100#, Ruyuan Rd.,Xiangcheng District,Suzhou,China

TEL:+86-512-66189999

FAX:+86-512-66189888

info@boneng.com

www.boneng.com